

Product description


- > Highly versatile 25W dimmable driver. One product suitable for many constant current (CC) lamps and automatic switching/dimming/non-dimming applications
- > Low profile enclosure
- > Dimming control via ON/OFF occupancy control detector such as OS ECO
- > 2-stage function ON/DIM or ON/OFF control when used with simple ON/OFF control occupancy sensor, such as OS ECO
- > 3-stage function ON/DIM/OFF achievable when operated with multi-function occupancy sensors such as OS PRO
- > 4 selectable dimming levels; 10%, 20%, 30% and 50%

Properties

- > 25W multi-current selection dimmable driver for LED lamps
- > Will operate any LED series/parallel or combination lamp arrays up to 25W
- > Single channel output
- > Selectable 0% dimming level to provide ON/OFF function with simple occupancy sensor
- > Selectable 100% dimming level to disable dimming function and use as standard fixed-output driver
- > IP20 enclosure suitable for building-into LED luminaires
- > Horizontal push-wire terminations for easy hand or automated wiring
- > Complies with: EN61347-1, EN61347-2-13, EN55015, EN61000-3-2 (Class C), EN61000-3-3, EN61547
- > Suitable for luminaires conforming to EN60598-1
- > Incorporates active power factor correction (PFC) circuitry

Common Technical Data	
Input Supply Voltage	230V +/- 10%
Supply Frequency	50/60 Hz
Power Factor	>0.9
Maximum Tc	75°C
Earth Leakage Current	<0.5mA
Maximum Output Power	25W
IP Rating	IP20
Weight	130g

Model Number	Standard Pack Quantities	Weight
LE1025-1	50	8.9kg

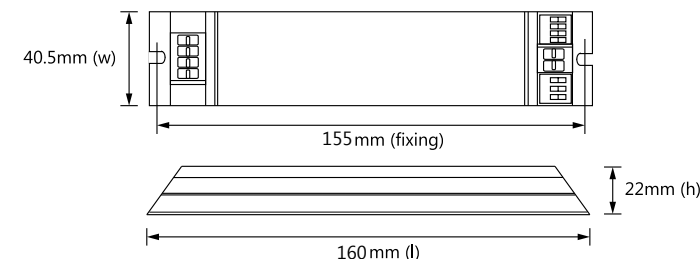

Accessories

A range of microwave occupancy sensors are available to provide multiple solutions with the Omni-PHASE driver, please refer to the accessories section.



Product specifications may be subject to change without prior notice.

Issue_2 March 2015